

## Architape Pro 50 IP67

### Flexible white LED strips



Architape Pro 50 IP67 white flexible waterproof LED strips are the perfect solution for outdoor LED linear decorative, cove lighting, curved applications, edge lighting and more.

These LED strips use the highest quality materials, including Nichia LEDs and a current stabilization system that ensures consistent performance and a long operating life.

The dust and dirt resistant housing is easy to clean and is fully UV resistant. It is also salt and solvent proof, making these tapes a reliable and versatile choice for creative outdoor lighting applications.


### Key features

- Waterproof IP67 LED strip
- For outdoor lighting applications
- 56 Nichia LEDs per metre
- 24V DC voltage input
- 3-step MacAdam LEDs or Single Bin LEDs
- Crystal clear housing
- UV, salt & solvent resistant
- Stabilized current design
- Dimmable
- Reverse voltage protection

### Applications

- Accent lighting
- Bridge lighting
- Cove lighting
- Facade lighting
- Mirror backlighting

### Dimensions

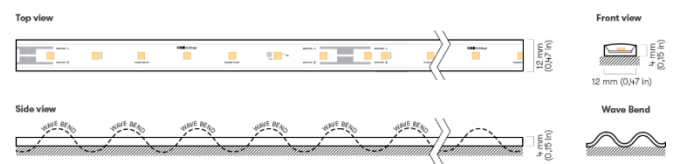

## Specification -24 V

| Product                 | Power   | Voltage | CRI     | CCT   | Lumen output | Efficacy | Max run |
|-------------------------|---------|---------|---------|-------|--------------|----------|---------|
| AP-50-5-24-N5-920-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 2000K | 338 Lm/m     | 70 Lm/W  | 13 m    |
| AP-50-5-24-N5-922-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 2200K | 365 Lm/m     | 76 Lm/W  | 13 m    |
| AP-50-5-24-N5-925-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 2500K | 396 Lm/m     | 83 Lm/W  | 13 m    |
| AP-50-5-24-N5-927-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 2700K | 559 Lm/m     | 116 Lm/W | 13 m    |
| AP-50-5-24-N5-930-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 3000K | 587 Lm/m     | 122 Lm/W | 13 m    |
| AP-50-5-24-N5-935-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 3500K | 602 Lm/m     | 125 Lm/W | 13 m    |
| AP-50-5-24-N5-940-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 4000K | 610 Lm/m     | 127 Lm/W | 13 m    |
| AP-50-5-24-N5-950-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 5000K | 613 Lm/m     | 128 Lm/W | 13 m    |
| AP-50-5-24-N5-957-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 5700K | 591 Lm/m     | 123 Lm/W | 13 m    |
| AP-50-5-24-N5-965-IP67  | 4.8 W/m | 24 V    | CRI 90+ | 6500K | 591 Lm/m     | 123 Lm/W | 13 m    |
| AP-50-10-24-N5-920-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 2000K | 658 Lm/m     | 69 Lm/W  | 7.5 m   |
| AP-50-10-24-N5-922-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 2200K | 712 Lm/m     | 74 Lm/W  | 7.5 m   |
| AP-50-10-24-N5-925-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 2500K | 772 Lm/m     | 80 Lm/W  | 7.5 m   |
| AP-50-10-24-N5-927-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 2700K | 1097 Lm/m    | 114 Lm/W | 7.5 m   |
| AP-50-10-24-N5-930-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 3000K | 1153 Lm/m    | 120 Lm/W | 7.5 m   |
| AP-50-10-24-N5-935-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 3500K | 1182 Lm/m    | 123 Lm/W | 7.5 m   |
| AP-50-10-24-N5-940-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 4000K | 1199 Lm/m    | 125 Lm/W | 7.5 m   |
| AP-50-10-24-N5-950-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 5000K | 1205 Lm/m    | 126 Lm/W | 7.5 m   |
| AP-50-10-24-N5-957-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 5700K | 1163 Lm/m    | 121 Lm/W | 7.5 m   |
| AP-50-10-24-N5-965-IP67 | 9.6 W/m | 24 V    | CRI 90+ | 6500K | 1163 Lm/m    | 121 Lm/W | 7.5 m   |