

Architape Pro 100 IP67

Flexible white LED strips



Architape Pro 100 IP67 white flexible waterproof LED strips are the perfect solution for outdoor LED linear decorative, cove lighting, curved applications, edge lighting and more.

These LED strips use the highest quality materials, including Nichia LEDs and a current stabilization system that ensures consistent performance and a long operating life.

The dust and dirt resistant housing is easy to clean and is fully UV resistant. It is also salt and solvent proof, making these tapes a reliable and versatile choice for creative outdoor lighting applications.


Key features

- Waterproof IP67 LED strip
- For outdoor lighting applications
- 112 Nichia LEDs per metre
- 24V DC voltage input
- 3-step MacAdam LEDs or Single Bin LEDs
- Crystal clear housing
- UV, salt & solvent resistant
- Stabilized current design
- Dimmable
- Reverse voltage protection

Applications

- Accent lighting
- Bridge lighting
- Cove lighting
- Facade lighting
- Mirror backlighting

Dimensions

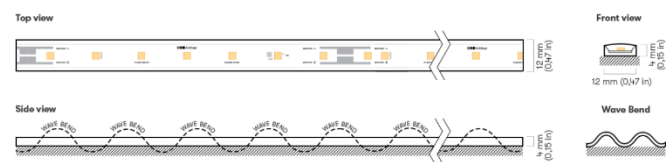

Specification – 24 V

Product	Power	Voltage	CRI	CCT	Lumen output	Efficacy	Max run
AP-100-5-24-N5-920-IP67	4.8 W/m	24 V	CRI 90+	2000K	342 Lm/m	71 Lm/W	13 m
AP-100-5-24-N5-922-IP67	4.8 W/m	24 V	CRI 90+	2200K	374 Lm/m	78 Lm/W	13 m
AP-100-5-24-N5-925-IP67	4.8 W/m	24 V	CRI 90+	2500K	401 Lm/m	84 Lm/W	13 m
AP-100-5-24-N5-927-IP67	4.8 W/m	24 V	CRI 90+	2700K	564 Lm/m	117 Lm/W	13 m
AP-100-5-24-N5-930-IP67	4.8 W/m	24 V	CRI 90+	3000K	593 Lm/m	123 Lm/W	13 m
AP-100-5-24-N5-935-IP67	4.8 W/m	24 V	CRI 90+	3500K	607 Lm/m	126 Lm/W	13 m
AP-100-5-24-N5-940-IP67	4.8 W/m	24 V	CRI 90+	4000K	616 Lm/m	128 Lm/W	13 m
AP-100-5-24-N5-950-IP67	4.8 W/m	24 V	CRI 90+	5000K	618 Lm/m	129 Lm/W	13 m
AP-100-5-24-N5-957-IP67	4.8 W/m	24 V	CRI 90+	5700K	596 Lm/m	124 Lm/W	13 m
AP-100-5-24-N5-965-IP67	4.8 W/m	24 V	CRI 90+	6500K	596 Lm/m	124 Lm/W	13 m
AP-100-10-24-N5-920-IP67	9.6 W/m	24 V	CRI 90+	2000K	676 Lm/m	70 Lm/W	9 m
AP-100-10-24-N5-922-IP67	9.6 W/m	24 V	CRI 90+	2200K	730 Lm/m	76 Lm/W	9 m
AP-100-10-24-N5-925-IP67	9.6 W/m	24 V	CRI 90+	2500K	793 Lm/m	83 Lm/W	9 m
AP-100-10-24-N5-927-IP67	9.6 W/m	24 V	CRI 90+	2700K	1118 Lm/m	116 Lm/W	9 m
AP-100-10-24-N5-930-IP67	9.6 W/m	24 V	CRI 90+	3000K	1174 Lm/m	122 Lm/W	9 m
AP-100-10-24-N5-935-IP67	9.6 W/m	24 V	CRI 90+	3500K	1204 Lm/m	125 Lm/W	9 m
AP-100-10-24-N5-940-IP67	9.6 W/m	24 V	CRI 90+	4000K	1221 Lm/m	127 Lm/W	9 m
AP-100-10-24-N5-950-IP67	9.6 W/m	24 V	CRI 90+	5000K	1226 Lm/m	128 Lm/W	9 m
AP-100-10-24-N5-957-IP67	9.6 W/m	24 V	CRI 90+	5700K	1182 Lm/m	123 Lm/W	9 m
AP-100-10-24-N5-965-IP67	9.6 W/m	24 V	CRI 90+	6500K	1182 Lm/m	123 Lm/W	9 m
AP-100-15-24-N5-920-IP67	14.4 W/m	24 V	CRI 90+	2000K	1000 Lm/m	69 Lm/W	7 m
AP-100-15-24-N5-922-IP67	14.4 W/m	24 V	CRI 90+	2200K	1082 Lm/m	75 Lm/W	7 m
AP-100-15-24-N5-925-IP67	14.4 W/m	24 V	CRI 90+	2500K	1174 Lm/m	82 Lm/W	7 m
AP-100-15-24-N5-927-IP67	14.4 W/m	24 V	CRI 90+	2700K	1661 Lm/m	115 Lm/W	7 m
AP-100-15-24-N5-930-IP67	14.4 W/m	24 V	CRI 90+	3000K	1745 Lm/m	121 Lm/W	7 m
AP-100-15-24-N5-935-IP67	14.4 W/m	24 V	CRI 90+	3500K	1790 Lm/m	124 Lm/W	7 m
AP-100-15-24-N5-940-IP67	14.4 W/m	24 V	CRI 90+	4000K	1815 Lm/m	126 Lm/W	7 m
AP-100-15-24-N5-950-IP67	14.4 W/m	24 V	CRI 90+	5000K	1824 Lm/m	127 Lm/W	7 m
AP-100-15-24-N5-957-IP67	14.4 W/m	24 V	CRI 90+	5700K	1760 Lm/m	122 Lm/W	7 m
AP-100-15-24-N5-965-IP67	14.4 W/m	24 V	CRI 90+	6500K	1760 Lm/m	122 Lm/W	7 m

Specification – 48 V

Product	Power	Voltage	CRI	CCT	Lumen output	Efficacy	Max run
AP-100-5-48-N5-920-IP67	4.8 W/m	48 V	CRI 90+	2000K	342 Lm/m	71 Lm/W	28.5 m
AP-100-5-48-N5-922-IP67	4.8 W/m	48 V	CRI 90+	2200K	374 Lm/m	78 Lm/W	28.5 m
AP-100-5-48-N5-925-IP67	4.8 W/m	48 V	CRI 90+	2500K	401 Lm/m	84 Lm/W	28.5 m
AP-100-5-48-N5-927-IP67	4.8 W/m	48 V	CRI 90+	2700K	564 Lm/m	117 Lm/W	28.5 m
AP-100-5-48-N5-930-IP67	4.8 W/m	48 V	CRI 90+	3000K	593 Lm/m	123 Lm/W	28.5 m
AP-100-5-48-N5-935-IP67	4.8 W/m	48 V	CRI 90+	3500K	607 Lm/m	126 Lm/W	28.5 m
AP-100-5-48-N5-940-IP67	4.8 W/m	48 V	CRI 90+	4000K	616 Lm/m	128 Lm/W	28.5 m
AP-100-5-48-N5-950-IP67	4.8 W/m	48 V	CRI 90+	5000K	618 Lm/m	129 Lm/W	28.5 m
AP-100-5-48-N5-957-IP67	4.8 W/m	48 V	CRI 90+	5700K	596 Lm/m	124 Lm/W	28.5 m
AP-100-5-48-N5-965-IP67	4.8 W/m	48 V	CRI 90+	6500K	596 Lm/m	124 Lm/W	28.5 m
AP-100-5-48-N5-920-IP67	9.6 W/m	48 V	CRI 90+	2000K	676 Lm/m	70 Lm/W	22.5 m
AP-100-5-48-N5-922-IP67	9.6 W/m	48 V	CRI 90+	2200K	730 Lm/m	76 Lm/W	22.5 m
AP-100-5-48-N5-925-IP67	9.6 W/m	48 V	CRI 90+	2500K	793 Lm/m	83 Lm/W	22.5 m
AP-100-5-48-N5-927-IP67	9.6 W/m	48 V	CRI 90+	2700K	1118 Lm/m	116 Lm/W	22.5 m
AP-100-5-48-N5-930-IP67	9.6 W/m	48 V	CRI 90+	3000K	1174 Lm/m	122 Lm/W	22.5 m
AP-100-5-48-N5-935-IP67	9.6 W/m	48 V	CRI 90+	3500K	1204 Lm/m	125 Lm/W	22.5 m
AP-100-5-48-N5-940-IP67	9.6 W/m	48 V	CRI 90+	4000K	1221 Lm/m	127 Lm/W	22.5 m
AP-100-5-48-N5-950-IP67	9.6 W/m	48 V	CRI 90+	5000K	1226 Lm/m	128 Lm/W	22.5 m
AP-100-5-48-N5-957-IP67	9.6 W/m	48 V	CRI 90+	5700K	1182 Lm/m	123 Lm/W	22.5 m
AP-100-5-48-N5-965-IP67	9.6 W/m	48 V	CRI 90+	6500K	1182 Lm/m	123 Lm/W	22.5 m