


TW2 112/Nx G5 09W 827

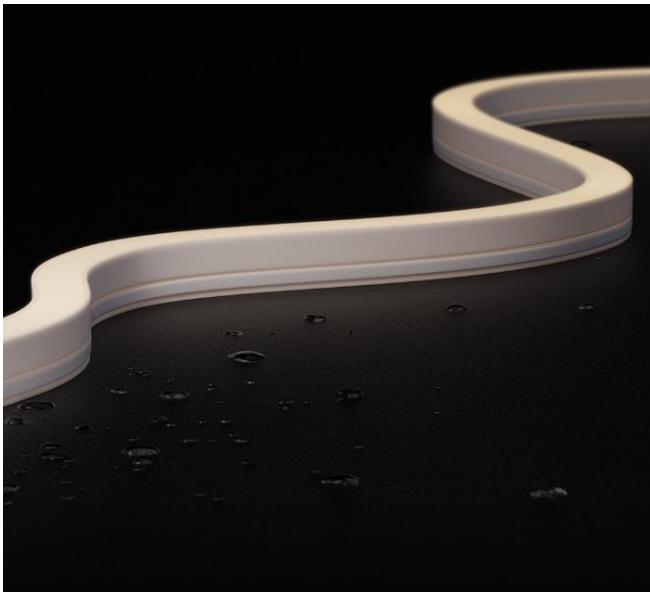

Opaline Flex SB Gen2 TW


Tuneable white side bend LED line

Opaline Flex SB Gen2 TW is a tuneable white side bend LED line designed for outdoor lighting projects that need a creative and flexible lighting solution.


With a flexible polyurethane housing, the Opaline Flex SB Gen2 TW can easily adjust to the geometry of building facades and structures while delivering a uniform light effect.

Fully encapsulated and protected from the elements, these high-quality LED lines are built for long-term professional applications.

DIMENSIONS

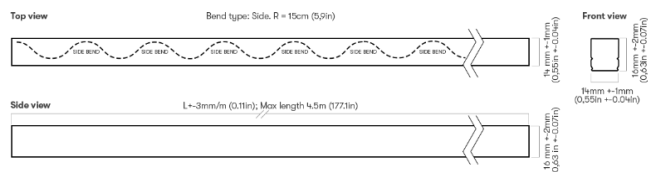

PHOTOMETRICS

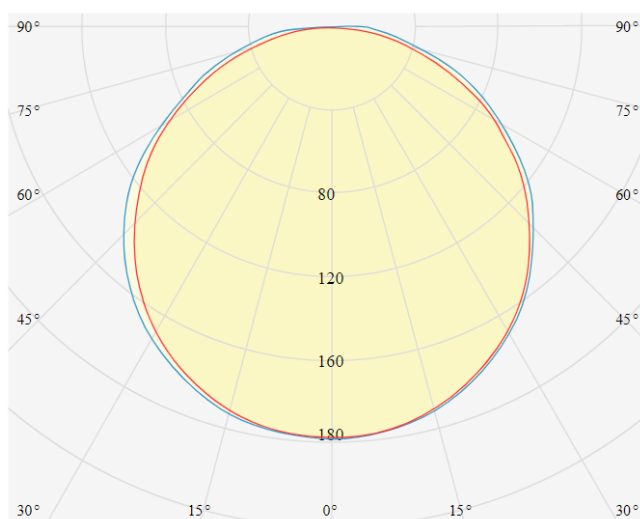

LIGHT TYPE	Tuneable white
LEDs/M	112 LEDs/m
CCT	2700K-6500K
CRI	CRI 80+
COLOR CONSISTENCY	3-Step MacAdam
LUMINOUS FLUX	736 Lm/m (224 Lm/ft)
EFFICACY	77 Lm/W
LIFETIME	L90B10 60.000 h
CONTROL	Dimmable
VOLTAGE	24 VDC
WATTAGE	9.6 W/m 2.93 W/ft
CUTTING STEP	62.5 mm (2.46")
OTHER DETAILS	IP67 protection Bend radius: 15 cm (5.9")
DIMENSIONS	Width: 14 mm (0.55") Height: 16 mm (0.63") Length: Up to 4.5 m (15')
TEMPERATURE	Tc max <75°C (167°F)
OPERATING TEMP.	-25°C...+50°C (13°F...122°F)