

A025 Aluminium Profile

Indoor LED light fixture




A round fixture for suspended linear lights, perfect for decorative, task and accent lighting applications. Made from lightweight aluminium, it is designed for long-term indoor professional lighting applications.

This profile is the ideal match for our Architape Pro LED tapes. These white, tuneable white and RGB+W LED tapes are available in a wide range of colour temperatures (CCT) and with a colour rendering index (CRI) of up to 98+.

Specifications

- Width: 18.5 mm
- Height: 15.8 mm
- Length: up to 3 m
- Light output ratio:
 - Opal: 70% transmission
 - Clear: 95% transmission
- TC temperature: up to 75 °C
- Operating temperature: -25 °C to +50 °C
- LED engine: up to 24 W/m

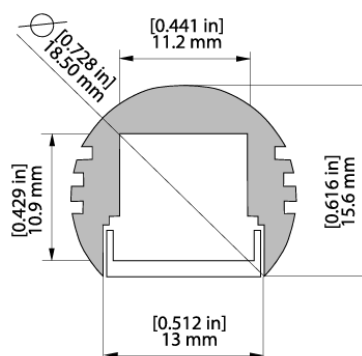

Cover options




Clear (95%)
PRG.A002X.C01.CLR



Opal (70%)
PRG.A002X.C01.OPL



Opal (70%)
PRG.A002X.C02.OPL



Clear round (95%)
PRG.A007X.C01.CLR



Opal round (70%)
PRG.A007X.C01.OPL

Housing colour

Product Code	Colour
PRG.A025.EXT.AGY	Anodized grey
PRG.A025.EXT.PWE	Powder coated white
PRG.A025.EXT.PBK	Powder coated black

* Powder coated options only available on request.

Mounting brackets

The A025 profile is mounted using a flush zinc bracket (PRG.A009X.F01.GZK) or a rotatable holding bracket (PRG.A025X.F01.GZK).



End caps

Description	Product code
End cap (grey)	PRG.A025x.E1x.RGY
End cap with hole (grey)	PRG.A025x.E1h.RGY



Socket connectors

Code	Description
GOT.00001 / HR 2PIN P1F.NON LXXX	2-pin socket
GOT.00001 / HR 3PIN P1F.NON LXXX	3-pin socket
GOT.00001 / HR 4PIN P1F.NON LXXX	4-pin socket
GOT.00001 / HR 5PIN P1F.NON LXXX	5-pin socket

Socket/plug connectors

Code	Description
GOT.00001 / HR 2PIN P1M.P1F LXXX	2-pin extension
GOT.00001 / HR 3PIN P1M.P1F LXXX	3-pin extension
GOT.00001 / HR 4PIN P1M.P1F LXXX	4-pin extension
GOT.00001 / HR 5PIN P1M.P1F LXXX	5-pin extension

Plug connectors

Code	Description
GOT.00001 / HR 2PIN P1M.NON LXXX	2-pin plug
GOT.00001 / HR 3PIN P1M.NON LXXX	3-pin plug
GOT.00001 / HR 4PIN P1M.NON LXXX	4-pin plug
GOT.00001 / HR 5PIN P1M.NON LXXX	5-pin plug



Connector wire lengths

Code	L200	L500	L1000	L2000	L3000	L5000	L9000
Length	200 mm	500 mm	1000 mm	2000 mm	3000 mm	5000 mm	9000 mm
	8 in	1 ft 8 in	3 ft 3 in	6 ft 6 in	9 ft 9 in	16 ft 5 in	29 ft 6 in

Architape Pro LED tapes

Delivering high-quality light output based on Nichia LEDs, Architape Pro LED tapes are available in white, tuneable white or RGB+W, across a wide range of colour temperatures and up to a very high colour rendering index of 98+.

Architape Pro 50

These white light LED strips are available in a range of power outputs and at fixed colour temperatures from 2000K to 6500K.

Specifications

- 56 Nichia LEDs/m
- Operating voltage: 24 VDC
- Power consumption: 4.8 W/m – 19.2 W/m
- Colour rendering index (CRI): 80, 90, 98+-
- Colour temperature: 2000K-6500K (CRI 80, 90), 3000-5000 (CRI 98+)

Architape Pro 100

Offering highly homogenous light output, these white light LED strips are available in a range of power outputs and at fixed colour temperatures from 2000K to 6500K.

Specifications

- 112 Nichia LEDs/m
- Operating voltage: 24 VDC
- Power consumption: 4.8 W/m – 19.2 W/m
- Colour rendering index (CRI): 80, 90, 98+-
- Colour temperature: 2000K-6500K (CRI 80, 90), 3000-5000 (CRI 98+)

Architape Pro TW & TW2

These tuneable white light LED strips can be adjusted to any colour temperature from 2000K to 6500K.

Specifications

- 56, 70 or 112 (TW2) Nichia LEDs/m
- Operating voltage: 24 VDC
- Power consumption: 9.6 W/m – 33.6 W/m
- Colour rendering index (CRI): 80, 90, 98+-
- Colour temperature: 2000K-6500K (CRI 80, 90), 3000-5000 (CRI 98+)

Architape Pro RGB+W

These coloured LED strips can be set to any colour and are available in white light colour temperatures from 2000K to 6500K.

Specifications

- 48 RGB + 48 white Nichia LEDs/m
- Operating voltage: 24 VDC
- Power consumption: 14.4 W/m – 24.0 W/m
- Colour rendering index (CRI): 80, 90, 98+-
- White colour temperature: 2000K-6500K (CRI 80, 90), 3000-5000 (CRI 98+)